

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 July 2003 (24.07.2003)

PCT

(10) International Publication Number
WO 03/060417 A1

(51) International Patent Classification⁷: F41J 7/04

(74) Agent: HEINÄNEN OY; Annankatu 31-33 C, FIN-00100 Helsinki (FI).

(21) International Application Number: PCT/FI03/00014

(22) International Filing Date: 9 January 2003 (09.01.2003)

(25) Filing Language: Finnish

(26) Publication Language: English

(30) Priority Data:
20020091 17 January 2002 (17.01.2002) FI

(71) Applicant (for all designated States except US): HONESTAS OY [FI/FI]; Haahkakuja 3 A 8, FIN-00200 Helsinki (FI).

(72) Inventor; and


(75) Inventor/Applicant (for US only): KUOSA, Risto [FI/FI]; Haahkakuja 3 A 8, FIN-00200 Helsinki (FI).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: TARGET SYSTEM

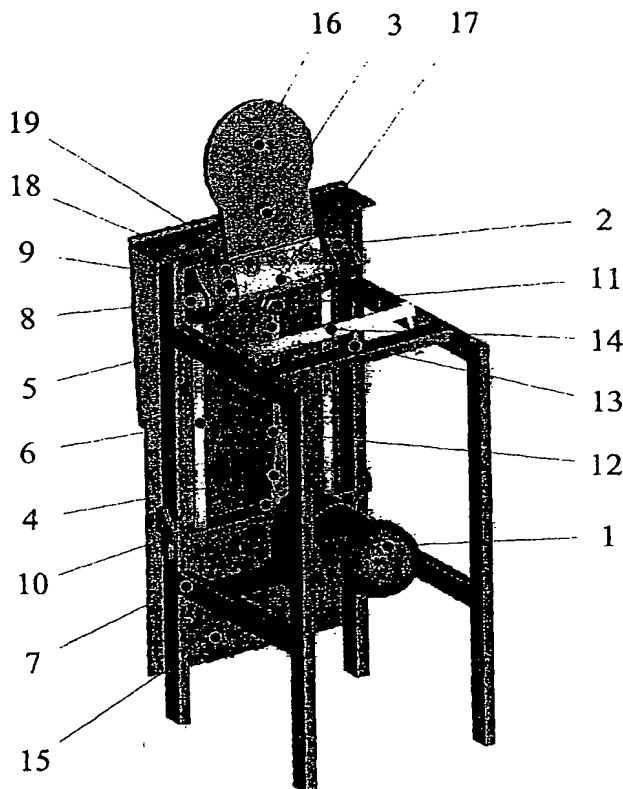

(57) Abstract: A target system provided with a pop-up target, said system comprising a target (3) overturnable by an impact and an actuating mechanism for moving the target (3), said target being connected to the actuating mechanism by a pivot structure (8, 9), and said actuating mechanism comprising a lifter for lifting the target to an upright position and an electric motor (1) for moving the lifter. The actuating mechanism comprises a vertical rail system (6) and a carriage part (2) vertically movable along it by the electric motor, said pivot structure (8, 9) being arranged on said carriage part. The lifter is a supporting lifter device (13, 14), against which the target falls when hit and which, when the carriage (2) is lowered, lifts the target to an upright position substantially by utilizing the movement of the carriage and the inertia of the target.